INTERNET

Data sheet: DC-215

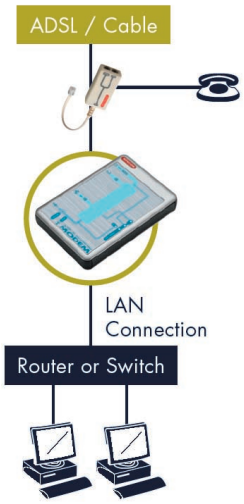

Product code	:	DC-215
Product name	:	Broadband ADSL Modem
EAN code	:	8716502004447
Qty. masterpack / carton	:	5/20
Product weight	:	165 gr.
Product dimensions	:	135 (L) x 87 (W) x 22 mm (H)
Gift box weight	:	1.3 kg
Gift box dimensions	:	230 (L) x 187,5 (W) x 62 mm (H)
Carton weight	:	16 kg.
Carton dimensions	:	460 (L) x 264 (W) x 370 mm (H)

This ADSL Modem enables you to create a super-fast broadband Internet connection via ADSL. The ADSL Modem is easy to configure with the aid of the built-in unique ISP selection program. This makes it possible for you to select your Internet provider and your subscription, the Modem then being adjusted fully automatically according to the requirements of the particular provider. Thanks to all current protocols being supported, the Modem is eminently suited for all existing ADSL connections. You can connect the ADSL Modem to your PC or network, both via the USB and via a UTP network cable. Because of this feature, the ADSL Modem is suitable for use combined with a router for internet sharing and for stand alone use (via USB, no network card required).

Box content:

- Broadband ADSL Modem
- Driver CD Rom
- User manual
- ADSL / telephone cable
- Crossed UTP cable
- USB A-B cable
- AC Adapter 220 V

System requirements:

- Windows 98SE/2000/ME/XP
- ADSL subscription (via ISP), annex B
- USB connection / network connection
- CD Rom drive

INTERNET

Data sheet: DC-215

Key features:

- High-speed Internet Access with ISDN/ ADSL (Annex B)
- Ease of Use with Quick Installation Utility
- Dual-port ADSL Router with Ethernet and USB
- SOHO Firewall Security with NAT Technology and Packet Filtering
- Support Virtual Private Network Pass Through
- Web-based Configuration, Management and Firmware Upgrade

Technical specifications:

- ADSL Home station (USB*1+Ethernet*1/ Annex B
- Easy Configuration via ISP list
- provides a high-speed Ethernet port and an USB port for high-speed Internet browsing
- support downstream transmission rates of up to 8Mbps and upstream transmission rates of up to 1024Kbps
- compliant with Multi-Mode standard (ANSI T1.413, Issue 2; G.dmt (G.992.1); G.lite (G992.2); G.hs (G994.1))
- Serves as an Internet firewall
- provides the natural firewall function (Network Address Translation, NAT),
- Integrated DHCP services, client and server
- Virtual Service function allows the product to provide limited visibility to local machines with specific services for outside users
- LAN Port RJ-45, 1 port 10/100Base-T (IEEE 802.3) it could be simultaneous operation with USB port (Auto-MDIX)
- WAN Port RJ-11, 1 ADSL port to external DSL/Cable Homestation, or other network equipment
- Input: 230V/50Hz, Output: 12V/800mA, AC/AC Linear Power Adaptor
- Web Based GUI